




## RV LED Accent and General Lighting - Efficient, Long Lasting, Easy Retrofit

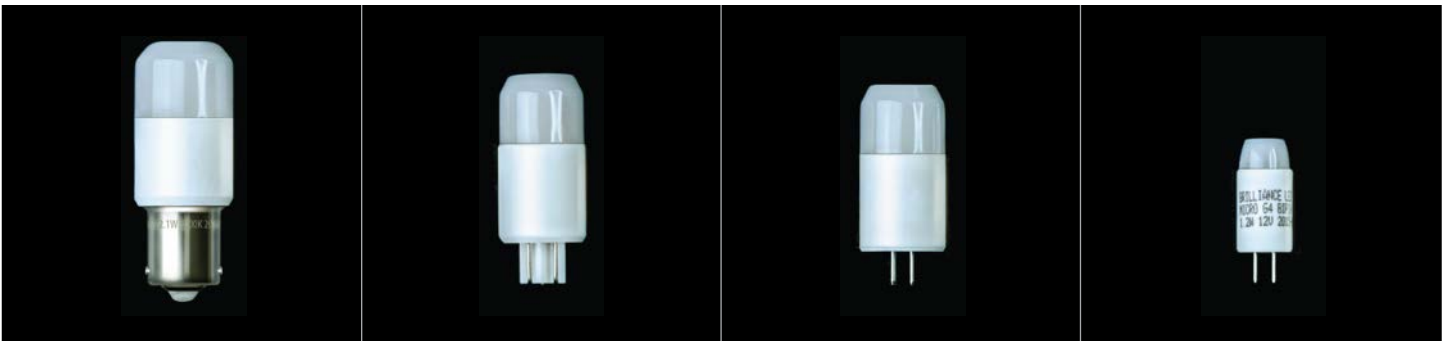

### SCB 1156 BASE

The NGL LED Single Contact Bayonet (SCB) is a sub-compact LED that utilizes the Epistar chipset and also features NGL LEDs multi-directional beam pattern. This SCB is energy efficient and water resistant. Designed specifically for RVs.

- Wattage 2
- Lumens 200
- Beam spread multi-directional
- Kelvin Temperature 2700, 5700
- Operating Range 8-25V AC
- Input Voltage 12V/24V/ AC/DC
- Replaces 20W Halogen
- Warranty (years) 5

### T-5 WEDGE BASE

The NGL LED T-5 Wedge is a sub-compact LED that utilizes the Epistar chipset and also features NGL LEDs multi-directional beam pattern. This T-5 is energy efficient and water resistant. Designed specifically for RVs.

- Wattage 1.2
- Lumens 100
- Beam spread multi-directional
- Kelvin Temperature 2700, 5700
- Operating Range 10-14 VAC
- Input Voltage 12VAC/DC
- Replaces 10W Halogen
- Warranty (years) 3

### G-4 PIN BASE

The NGL LED G-4 Bipin is a sub-compact LED that utilizes the Epistar chipset and also features NGL LEDs multi-directional beam pattern. This bipin is energy efficient and water resistant. Designed specifically for RVs.

- Wattage 2
- Lumens 200
- Beam spread multi-directional
- Kelvin Temperature 2700, 3000, 5700
- Operating Range 8-25V AC
- Input Voltage 12V/24V/ AC/DC
- Replaces 20W Halogen
- Warranty (years) 5

### MICRO G-4 PIN BASE

The NGL LED Micro G-4 Bipin is a sub-compact LED that utilizes Samsung's chipset and also features NGL LEDs multi-directional beam pattern. This Micro G-4 bipin is energy efficient and water resistant. Designed specifically for RVs.

- Wattage 1.2
- Lumens 100
- Beam spread multi-directional
- Kelvin Temperature 2700, 5700,
- Operating Range 10-14 VAC
- Input Voltage 12VAC/DC
- Replaces 10W Halogen
- Warranty (years) 3

2734 S 3600 W • Suite B • Salt Lake City, Utah 84119 • Toll Free: +1 844-451-9958 • [www.NGLscorp-rv.com](http://www.NGLscorp-rv.com)