




# Product Update - *October 1, 2018*

	<p><b>Flood Lights</b></p> <ul style="list-style-type: none"> <li>• 10 Watt</li> <li>• 20 Watt</li> <li>• 30 Watt</li> </ul> <p><a href="#">* Details Page 1</a></p>
 <p>White</p>	<p><b>NC (Power Saver) Mini Module</b></p> <ul style="list-style-type: none"> <li>• .48 Watts per module (1.92 Watts per foot)</li> <li>• 106 Modules per 60 watt power supply</li> <li>• 10,000 K</li> </ul> <p><a href="#">* Details Page 2</a></p>
 <p>Red</p>	<p><b>NC Samsung Module</b></p> <ul style="list-style-type: none"> <li>• .48 Watts per module (1.92 Watts per foot)</li> <li>• 106 Modules per 60 watt power supply</li> <li>• Red (625 nm wavelength)</li> </ul> <p><a href="#">* Details Page 3</a></p>

# Flood Lights

• 10 Watt • 20 Watt • 30 Watt




- 10 W
- AC 120V
- 10 Watt
- 1200 Beam angle
- 1,100 Lumens
- 110 Lumens per Watt
- 5700 K CCT (K)
- UL Certified
- Rated IP65

- 20 W
- AC 120V
- 20 Watt
- 1200 Beam angle
- 2,200 Lumens
- 110 Lumens per Watt
- 5700 K CCT (K)
- UL Certified
- Rated IP65
- Available in U bracket and J-box knuckle

- 30 W
- AC 120V
- 30 Watt
- 1200 Beam angle
- 3,300 Lumens
- 110 Lumens per Watt
- 5700 K CCT (K)
- UL Certified
- Rated IP65
- Available in U bracket and J-box knuckle

# NC Mini Modules

## MINI3 LW-W White

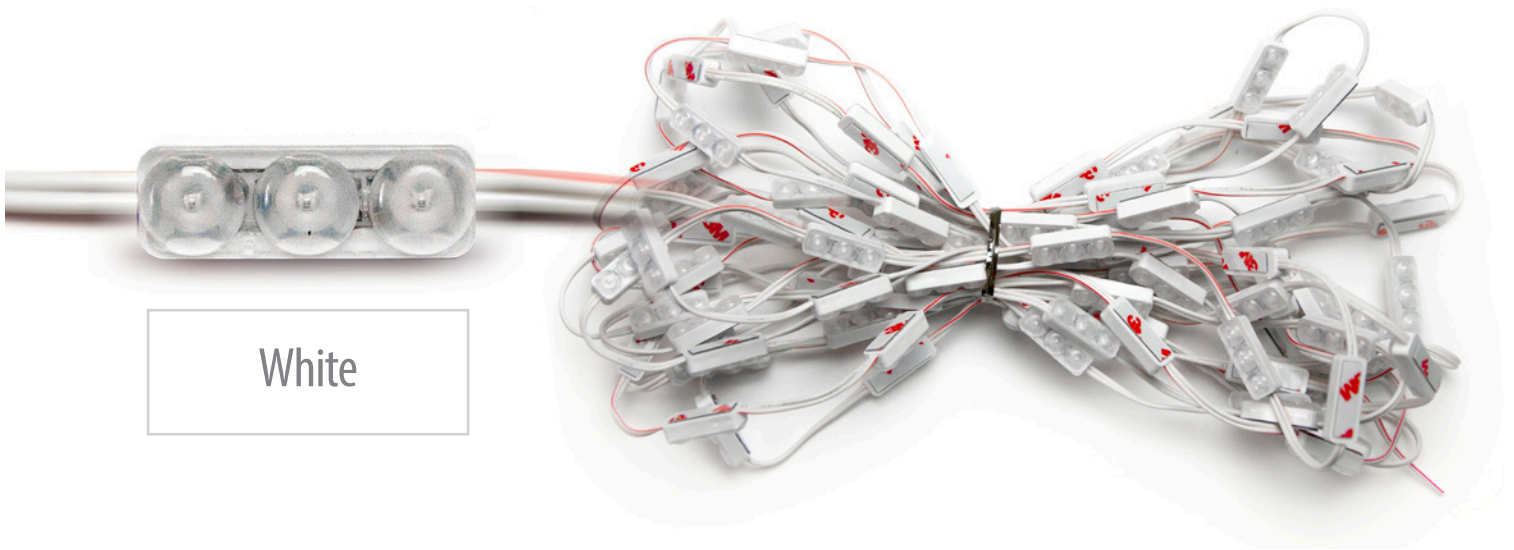

White


- 12 Volts
- 10,000 K
- 1600 Viewing Angle
- 4 modules per foot
- .48 Watts per module  
(1.92 Watts per foot)

- 92 Lumens per watt (176 Lumens per foot)
- 200 Modules (50 foot) per bag
- 106 Modules per 60 Watt power supply
- Approved by UL, CE, RoHS
- Rated IP 68



# NC Mini Modules

## MINI3 LW-R Red

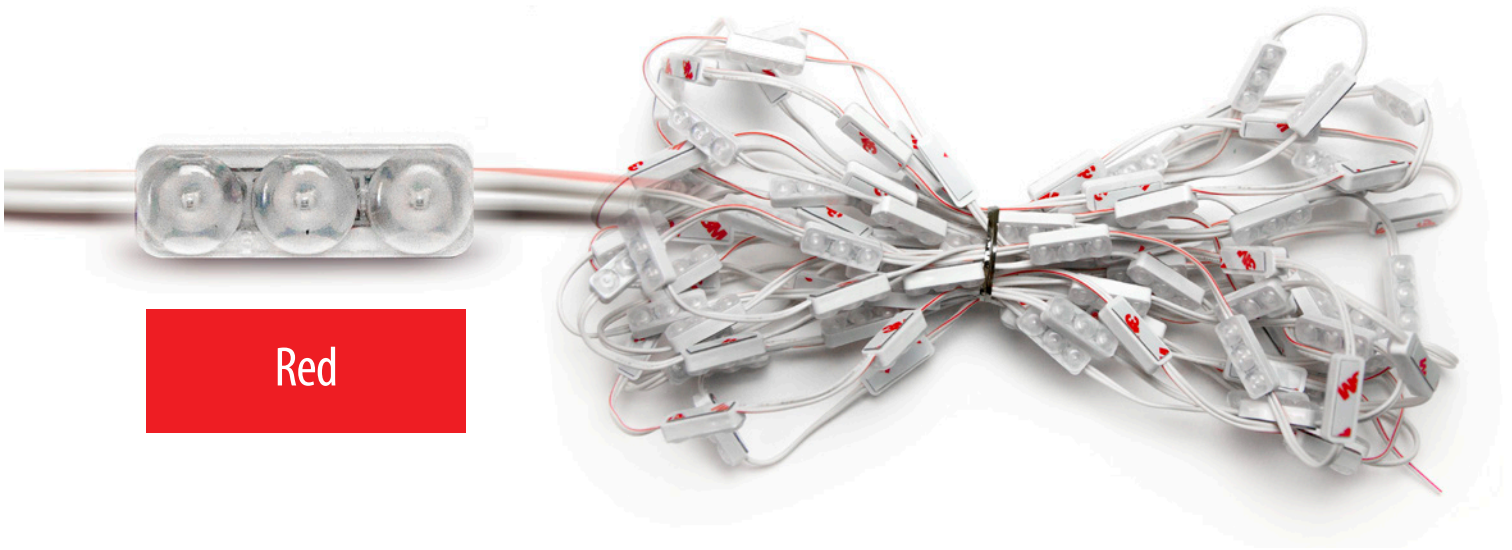

Red

- 12 Volts
- Red (625 nm wavelength)
- 1500 Viewing Angle
- 4 modules per foot
- .48 Watts per module (1.92 Watts per foot)
- 20 Lumens per watt (39 Lumens per foot)
- 200 Modules (50 foot) per bag
- 106 Modules per 60 Watt power supply
- Approved by UL, CE, RoHS
- Rated IP 68

